


Technical Data Sheet

VB-5 is a thin, closed cell urethane foam designed to decouple independently vibrating structures and eliminate squeaks, rattles and buzzes. **VB-5** features an aggressive, modified acrylic adhesive which makes it suitable for exterior applications. **VB-5** is impervious to water and harsh chemicals.

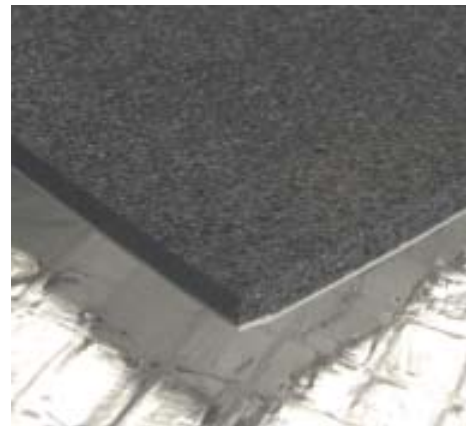

Benefits:

- Thin, lightweight design
- Easy installation
- Highly water / chemical resistant
- Aggressive modified acrylic adhesive

Applications:

- Eliminate annoying squeaks, rattles and buzzes between automotive interior panels
- Gasket automotive taillight assemblies and third brake lights
- Gasketing material for speaker installations
- Foam backing for custom upholstery

Properties:

Color.....	Black
Sheet Size (inches).....	4pcs; 10" x 10"
Weight (lbs./sq. ft.).....	0.12
Thickness.....	0.125 inch
Flammability.....	UL94HF-1, Dot MU55302 (pass)
Tensile Strength.....	100
Elongation % (Typical).....	100
Service Temperature.....	Low: 0 deg. F, High continuous: +160 deg. F
Adhesive.....	Modified Acrylic (unsupported)